


## ELECTROLYTE CAPACITORS AUDYN® FFC

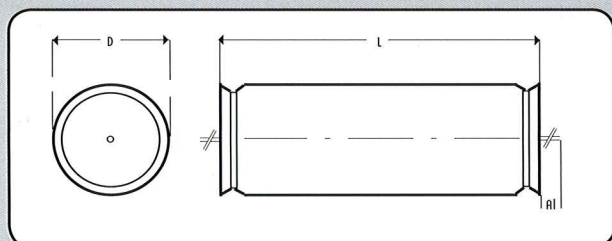

Signal capacitor of the highest quality with petroleum impregnation.

Anode: Aluminium  
 Capacity Region: from 0.010  $\mu\text{F}$  to 4.7  $\mu\text{F}$   
 Wire Voltage: 400 V  
 Connection Length: min. 50.0 mm  
 Loss Factor  $\tan \delta$ : < 0.0020 at 1 KHz  
 Design: Papier / Alu / Oil

High quality high-end capacitor for active audio circuits and the best suitable for Valve amplifier.

### Audyn Fine-First-Cap • 400 Volt

| Description | C/ $\mu\text{F}$ | DxL/mm | C-Tol. | Order Number |
|-------------|------------------|--------|--------|--------------|
| FFC0010     | 0.010            | 9x17   | 20 %   | 134 1802     |
| FFC0015     | 0.015            | 9x21   | 20 %   | 134 1804     |
| FFC0022     | 0.022            | 9x21   | 20 %   | 134 1806     |
| FFC0033     | 0.033            | 11x21  | 20 %   | 134 1808     |
| FFC0047     | 0.047            | 11x32  | 20 %   | 134 1810     |
| FFC0100     | 0.100            | 14x33  | 10 %   | 134 1812     |
| FFC0150     | 0.150            | 16x33  | 10 %   | 134 1814     |
| FFC0220     | 0.220            | 18x36  | 10 %   | 134 1816     |
| FFC0330     | 0.330            | 18x43  | 10 %   | 134 1818     |
| FFC0470     | 0.470            | 25x36  | 10 %   | 134 1820     |
| FFC0680     | 0.680            | 22x52  | 10 %   | 134 1822     |
| FFC1000     | 1.000            | 25x52  | 10 %   | 134 1824     |
| FFC2200     | 2.200            | 32x74  | 10 %   | 134 1826     |
| FFC3300     | 3.300            | 50x55  | 10 %   | 134 1827     |
| FFC4700     | 4.700            | 50x100 | 10 %   | 134 1828     |