



ERGF-AUDYN® LOW VOLTAGE ELECTROLYTE CAPACITORS POLED AXIAL

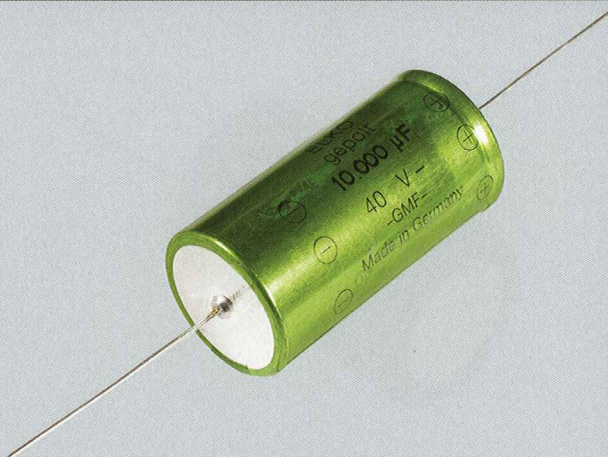

Electrolyte Capacitor, poled, rough foil

Connections: Copper Wire, tinned
 Capacity Region: 330 to 10.000µF
 Wire Voltage: 40V, 60V und 100V
 C-Toleranz: ± 20%
 Loss Factor: $\tan d < 0.15$ at 100 Hz
 (at C Werten > 4700µF: $\tan d < 0.20$)

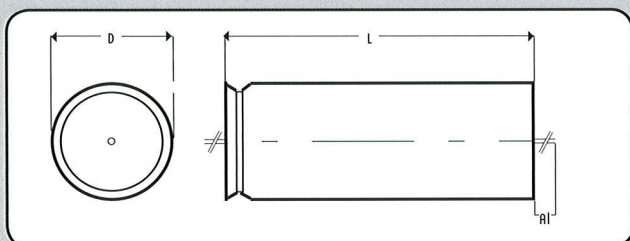

Audyn Cap Elko poled 40 V

Description	C/µF	Abm. D x L mm	Order Number
ERGF/4.7/40	470µF	12.5x26	150 1250
ERGF/10/40	1.000µF	14.5x30.5	150 1251
ERGF/22/40	2.200µF	14.5x35.5	150 1252
ERGF/33/40	3.300µF	18.5x35.5	150 1253
ERGF/47/40	4.700µF	21.5x40.5	150 1254
ERGF/68/40	6.800µF	25.5x40.5	150 1255
ERGF/100/40	10.000µF	25.5x50.5	150 1257

Audyn Cap Elko poled 63V

Description	C/µF	Abm. D x L mm	Order Number
ERGF/10/63	1.000µF	14.5x30.5	150 1267
ERGF/22/63	2.200µF	21.5x40.5	150 1268
ERGF/33/63	3.300µF	25.5x40.5	150 1269
ERGF/47/63	4.700µF	25.5x50.5	150 1270
ERGF/68/63	6.800µF	30.5x50.5	150 1271
ERGF/100/63	10.000µF	30.5x50.5	150 1272

Audyn Cap Elko poled 100 V

Description	C/µF	Abm. D x L mm	Order Number
ERGF/3.3/100	330µF	14.5x35.5	150 1280
ERGF/4.7/100	470µF	14.5x35.5	150 1281
ERGF/10/100	1.000µF	21.5x35.5	150 1282
ERGF/22/100	2.200µF	25.5x40.5	150 1283
ERGF/33/100	3.300µF	30.5x50.5	150 1284