


FOIL CAPACITORS AUDYN® MKT 100V

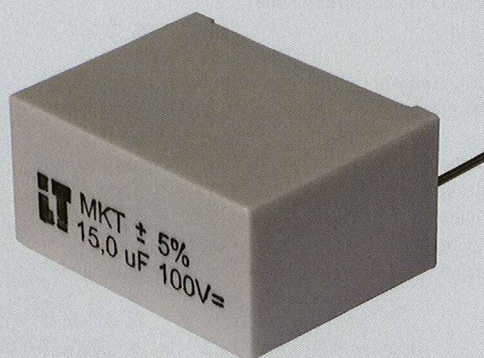

Foil Capacitor with Polyester foil

Connections:

Capacity Region:

Wire Voltage:

C-tolerance:

Loss Factor $\tan \delta$:

d2:

Copper Wire, tinned


from 0.01 μF to 33.0 μF

100 V

$\pm 5\%$

< 0.005 at 1 kHz

0.8 mm

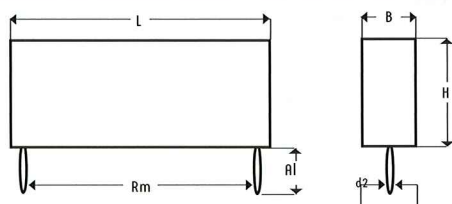

MKTR • 100 Volt

Description	C/ μF	L/mm	B/mm	H/mm	Rm/mm	Order No.
MKTR/001/100	0.01	10.0	4.00	10.0	10.0	134 1154
MKTR/010/100	0.10	18.0	5.00	11.0	10.0	134 1155
MKTR/022/100	0.22	18.0	5.00	11.0	10.0	134 1156
MKTR/033/100	0.33	18.0	5.00	11.0	15.0	134 1158
MKTR/047/100	0.47	18.0	5.00	11.0	15.0	134 1160
MKTR/068/100	0.68	18.0	5.00	11.0	15.0	134 1165
MKTR/1.0/100	1.00	18.0	5.00	11.0	15.0	134 1170
MKTR/1.5/100	1.50	26.5	6.00	15.0	15.0	134 1175
MKTR/2.2/100	2.20	26.5	6.00	15.0	22.5	134 1180
MKTR/2.7/100	2.70	26.5	6.00	15.0	22.5	134 1183
MKTR/3.3/100	3.30	26.5	7.00	16.0	22.5	134 1185
MKTR/3.9/100	3.90	26.5	8.50	17.0	22.5	134 1184
MKTR/4.7/100	4.70	32.0	9.00	17.0	27.5	134 1186
MKTR/5.6/100	5.60	32.0	9.00	17.0	27.5	134 1190
MKTR/6.8/100	6.80	32.0	9.00	17.0	27.5	134 1187
MKTR/8.2/100	8.20	32.0	11.0	20.0	27.5	134 1188
MKTR/10/100	10.0	32.0	11.0	20.0	27.5	134 1189
MKTR/15/100	15.0	32.0	15.0	24.0	27.5	134 1191
MKTR/22/100	22.0	32.0	15.0	24.0	27.5	134 1192
MKTR/33/100	33.0	42.5	22.0	30.0	37.5	134 1194