




➤ **FOIL CAPACITORS AUDYN® MKP 250V**

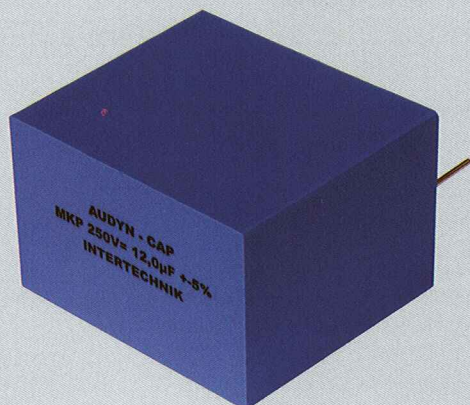

Foil Capacitor with Polypropylene foil

Connections: Copper Wire, tinned
 Capacity Region: from 1.0 μF to 47.0 μF
 Wire Voltage: 250 V
 C-Tolerance: $\pm 5\%$
 Loss Factor $\tan \delta$: < 0.0020 at 1 kHz

MKP radial 250 Volt

Description	C/ μF	L/mm	B/mm	H/mm	Rm/mm	Order No.
MKPR/1.0/250	1.0	43	10	30	37.5	150 0700
MKPR/1.5/250	1.5	43	10	20	37.5	150 0705
MKPR/2.2/250	2.2	43	10	20	37.5	150 0710
MKPR/2.7/250	2.7	43	11	22	37.5	150 0715
MKPR/3.3/250	3.3	43	14	25	37.5	150 0720
MKPR/3.9/250	3.9	43	16	29	37.5	150 0725
MKPR/4.7/250	4.7	43	17	28	37.5	150 0730
MKPR/5.6/250	5.6	43	22	30	37.5	150 0735
MKPR/6.8/250	6.8	43	22	30	37.5	150 0740
MKPR/8.2/250	8.2	43	28	37	37.5	150 0745
MKPR /10/250	10.0	43	28	37	37.5	150 0750
MKPR /12/250	12.0	43	28	37	37.5	150 0755
MKPR /15/250	15.0	43	35	45	37.5	150 0760
MKPR /22/250	22.0	43	40	50	37.5	150 0765
MKPR /33/250	33.0	59	40	50	52.5	150 0770
MKPR /47/250	47.0	59	40	50	52.5	150 0775