



➤ **FOIL CAPACITORS AUDYN® MKP Q6 / 600V**

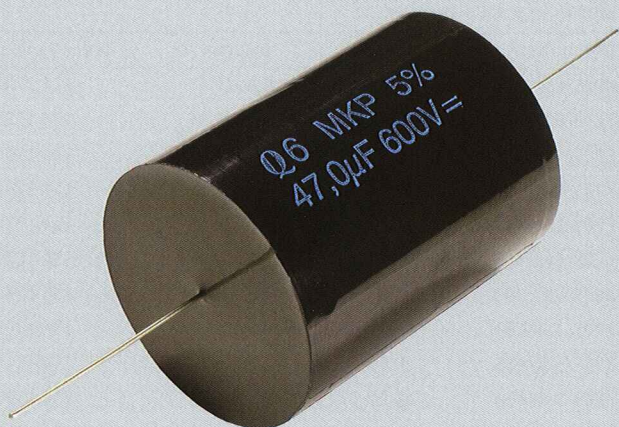

Foil capacitor with polypropylene foil

Connections: Copper Wire, tinned
 Capacity Region: 0.10-100.00µF
 Wire Voltage: 600V
 C-Tolerance: +-5%
 Loss Factor $\tan\delta$: < 0.0020 at 1 kHz

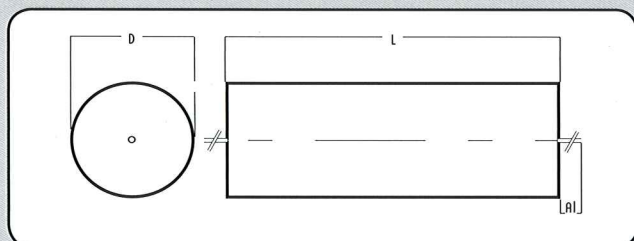

MKP-Q6 600V dc

Description	C/µF	Abm. D / L mm	Order No.
Q6/010/600	0.10µF	8 x 18	150 1000
Q6/015/600	0.15µF	8 x 18	150 1002
Q6/022/600	0.22µF	9 x 18	150 1004
Q6/033/600	0.33µF	11 x 18	150 1006
Q6/047/600	0.47µF	13 x 18	150 1008
Q6/056/600	0.56µF	14 x 18	150 1010
Q6/068/600	0.68µF	15 x 18	150 1012
Q6/082/600	0.82µF	12 x 35	150 1014
Q6/1.00/600	1.00µF	13 x 35	150 1016
Q6/1.50/600	1.50µF	15 x 35	150 1018
Q6/1.80/600	1.80µF	16 x 35	150 1020
Q6/2.20/600	2.20µF	18 x 35	150 1022
Q6/2.70/600	2.70µF	20 x 35	150 1024
Q6/3.30/600	3.30µF	22 x 35	150 1026
Q6/3.90/600	3.90µF	24 x 35	150 1028
Q6/4.70/600	4.70µF	26 x 35	150 1030
Q6/5.60/600	5.60µF	28 x 35	150 1032
Q6/6.80/600	6.80µF	31 x 35	150 1034
Q6/8.20/600	8.20µF	33 x 35	150 1036
Q6/10/600	10.0µF	35 x 35	150 1038
Q6/12/600	12.0µF	33 x 43	150 1040
Q6/15/600	15.0µF	35 x 43	150 1042
Q6/22/600	22.0µF	41 x 43	150 1044
Q6/33/600	33.0µF	41 x 61	150 1046
Q6/47/600	47.0µF	48 x 63	150 1048
Q6/56/600	56.0µF	53 x 63	150 1050
Q6/68/600	68.0µF	58 x 63	150 1052
Q6/82/600	82.0µF	64 x 63	150 1054
Q6/100/600	100.0µF	70 x 63	150 1056