


## FOIL CAPACITOR AUDYN® TRUE-SILVER ATS 1000 V DC



Capacitor with silver metallic foil. Dielectric: Polypropylene foil. Internal gang switch construction. Self-correcting. Stable circular construction.

|                         |                             |
|-------------------------|-----------------------------|
| Container:              | Plastic cup                 |
| Grouting:               | Epoxy                       |
| Connections:            | silver, massif 0,8 / 1,5 mm |
| Connection wires (AL) : | length / mm                 |
| Connection wires (d) :  | diameter / mm               |
| Capacity Region:        | from 0.10 µF to 12.,0 µF    |
| Wire Voltages:          | 1000 V DC                   |
| C-Tolerance:            | ± 2 %                       |
| Loss Factor tang δ:     | < 0.004 at 1KHz/25 °C       |
| Temperature region.     | - 25 °C to 70 °C            |

High quality high-end capacitor for passive and active audio circuits.

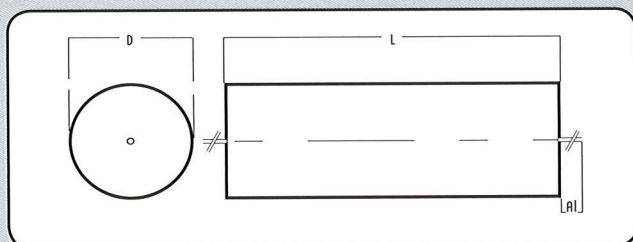

### AUDYN-True-Silver • ATS 1000 V DC

| Description   | C / µF | V(DC) | C-Tol. % | D x L/mm | AL / mm | Order No. |
|---------------|--------|-------|----------|----------|---------|-----------|
| ATS/0.10/1000 | 0,1    | 1000  | 2        | 20 x 35  | 50      | 134 6100  |
| ATS/0.15/1000 | 0,15   | 1000  | 2        | 20 x 35  | 50      | 134 6101  |
| ATS/0.22/1000 | 0,22   | 1000  | 2        | 20 x 35  | 50      | 134 6102  |
| ATS/0.33/1000 | 0,33   | 1000  | 2        | 20 x 35  | 50      | 134 6103  |
| ATS/0.47/1000 | 0,47   | 1000  | 2        | 20 x 35  | 50      | 134 6104  |
| ATS/0.56/1000 | 0,56   | 1000  | 2        | 20 x 35  | 50      | 134 6105  |
| ATS/0.68/1000 | 0,68   | 1000  | 2        | 20 x 35  | 50      | 134 6106  |
| ATS/0.82/1000 | 0,82   | 1000  | 2        | 25 x 45  | 50      | 134 6107  |
| ATS/1.00/1000 | 1,0    | 1000  | 2        | 25 x 45  | 50      | 134 6108  |
| ATS/1.20/1000 | 1,2    | 1000  | 2        | 25 x 45  | 50      | 134 6109  |
| ATS/1.50/1000 | 1,5    | 1000  | 2        | 25 x 45  | 50      | 134 6110  |
| ATS/1.80/1000 | 1,8    | 1000  | 2        | 25 x 45  | 50      | 134 6111  |
| ATS/2.00/1000 | 2,0    | 1000  | 2        | 30 x 45  | 50      | 134 6112  |
| ATS/2.20/1000 | 2,2    | 1000  | 2        | 25 x 60  | 50      | 134 6113  |
| ATS/2.70/1000 | 2,7    | 1000  | 2        | 25 x 60  | 50      | 134 6114  |
| ATS/3.30/1000 | 3,3    | 1000  | 2        | 30 x 60  | 50      | 134 6115  |
| ATS/3.90/1000 | 3,9    | 1000  | 2        | 30 x 60  | 50      | 134 6116  |
| ATS/4.70/1000 | 4,7    | 1000  | 2        | 35 x 60  | 50      | 134 6117  |
| ATS/5.60/1000 | 5,6    | 1000  | 2        | 35 x 60  | 50      | 134 6118  |
| ATS/6.80/1000 | 6,8    | 1000  | 2        | 40 x 60  | 50      | 134 6119  |
| ATS/8.20/1000 | 8,2    | 1000  | 2        | 45 x 60  | 50      | 134 6120  |
| ATS/10.0/1000 | 10,0   | 1000  | 2        | 50 x 60  | 50      | 134 6121  |
| ATS/12.0/1000 | 12,0   | 1000  | 2        | 55 x 60  | 50      | 134 6122  |

The Audyn True-Silver capacitor is cast in a vibration free casing and mechanically stabilized. The hard case protects the Audyn True-Silver from external damage. this special mechanical construction ensures stable.