


FOIL CAPACITOR AUDYN® - SILVER-GOLD ASG



Capacitor with polypropylene foil whereas 2 separate coils are connected in series. Through this a non-inductive and damping depleted setup is achieved.

Container:	Aluminium-Plastic Cup
Grouting:	Epoxy
Connections:	Copper Wires, tinned
Connection wires (AL) :	length / mm
Connection wires (d) :	diameter / mm
Capacity Region:	from 0,10 µF to 6,8 µF
Voltage:	250 to 1200 VDC
C-Tolerance:	± 2 %

High quality high-end capacitor for passive and active audio circuits.

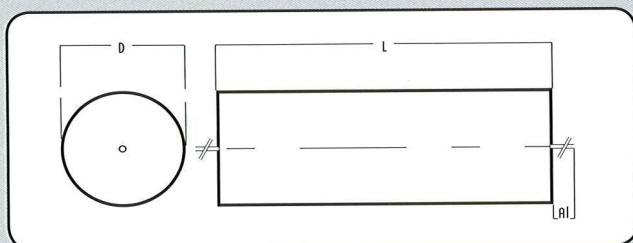

AUDYN-Silver-Gold • ASG

Description	C / µF	V(DC)	C-Tol. %	D x L/mm	AL / mm	Order No.
ASG/0.10/1200	0,1	1200	2	16 x 45	50	134 5100
ASG/0.15/1200	0,15	1200	2	22 x 45	50	134 5101
ASG/0.22/1200	0,22	1200	2	22 x 45	50	134 5102
ASG/0.33/1200	0,33	1200	2	25 x 45	50	134 5103
ASG/0.47/800	0,47	800	2	16 x 45	50	134 5104
ASG/0.56/800	0,56	800	2	16 x 45	50	134 5105
ASG/0.68/800	0,68	800	2	16 x 45	50	134 5106
ASG/0.82/800	0,82	800	2	18 x 45	50	134 5107
ASG/1.00/800	1,0	800	2	18 x 45	50	134 5108
ASG/1.50/800	1,5	800	2	22 x 45	50	134 5109
ASG/1.80/800	1,8	800	2	25 x 45	50	134 5110
ASG/2.20/800	2,2	800	2	25 x 45	50	134 5111
ASG/2.70/800	2,7	800	2	30 x 45	50	134 5112
ASG/3.30/800	3,3	800	2	30 x 45	50	134 5113
ASG/4.70/250	4,7	250	2	25 x 45	50	134 5114
ASG/6.80/250	6,8	250	2	30 x 45	50	134 5119